


SIZE	A=T	E	S	H	D	I MIN.	B	CUT DIA.	T.P.I.
30	1.114 <sup>+0.013</sup> / <sub>-.012</sub>	1.020 <sup>+0.013</sup> / <sub>-.012</sub>	0.054 <sup>+0.008</sup> / <sub>-.007</sub>	0.335 <sup>+0.008</sup> / <sub>-.007</sub>	0.752 <sup>+0.008</sup> / <sub>-.007</sub>	0.670	2° 8'	0.500	8

- SEALING SURFACE MUST BE SEAMLESS TOP, FLAT PREFERRED, SMOOTH AS POSSIBLE, AND MUST NOT DIP DOWN ON THE INSIDE OF THE FINISH. GLASS SUPPLIERS MAY USE A 2° MAX. ANGLE ON MOLD TO ENSURE THAT SEALING SURFACE WILL NOT DIP DOWN ON INSIDE. IF MEASURED FROM EXTREME TOP OF FINISH, THIS ANGLE INCREASES 'H' AND 'D' DIMENSIONS A MAX. OF .002. THIS SURFACE SHOULD BE AS PARALLEL AS POSSIBLE WITH THE BASE OF THE BOTTLE.
- 'H' DIMENSION REPRESENTS DISTANCE FROM TOP OF SEALING SURFACE DOWN TO HORIZONTAL LINE TANGENT TO THE BOTTOM SWING OF THE .031 MAXIMUM RADIUS AND IS REQUIRED FOR MOLD MAKERS.
- SATISFACTORY THREADING REQUIRES A MINIMUM OF 45° OF FULL WIDTH AND DEPTH OF THREAD. BEYOND THAT, THREAD IS TO RUN INTO BEAD. WALL OR 'E' DIAMETER BEYOND MINIMUM FULL DEPTH OF THREAD SHOULD BE INCREASED GRADUALLY TO FULL 'T' DIAMETER IN NO LESS THAN A 90° TURN.
- RADIUS TO BE AS SHARP AS POSSIBLE AND NOT TO EXCEED .031 MAX. RADIUS.
- THE RADIUS, ANGLE, AND DEPTH OF LOCKING RING IS VERY IMPORTANT FOR THE PROPER SEALING AND REMOVAL OF THE CAP.
- REQUIREMENTS FOR GOOD APPLICATION OF ROLL-ON CLOSURE:
  - THE RELIEF OF THE THREAD AND THE 'A' DIAMETER OF THE BEAD AT THE MOLD SEAM IS NOT TO EXCEED .008 ON DIAMETER IN AN ARC OF 30 DEGREES.
  - THE MINIMUM TOLERANCES OF THE THREAD 'T' DIAMETER AND THE BEAD 'A' DIAMETER DO NOT APPLY TO DEPRESSED AREAS.
  - VERTICAL MISMATCH OF THREAD NOT TO EXCEED .004 AT MOLD SEAM.
  - .015 MAXIMUM OUT OF PARALLEL SEALING SURFACE WITH BOTTOM OF THE BOTTLE. THIS IS FOR COCKED NECKS AND SLANTED FINISHES.
  - .094 MAX. OUT OF PERPENDICULAR FOR 750 ml AND LARGER BOTTLES.
  - .047 MAX. OUT OF PERPENDICULAR FOR 200 ml THROUGH 500 ml BOTTLES.
- THREAD TO START AT 45° FROM PARTING LINE.
- CERTAIN CAPPING MACHINE EQUIPMENT REQUIRES GUIDE BELL CLEARANCE AS SHOWN.
- MINIMUM 'I' DIMENSION IS FOR FILLING TUBE CLEARANCE AND EXTENDS THROUGH ENTIRE LENGTH OF THE FINISH AND THE BOTTLE NECK.
- TANGENT B =  $\frac{\text{PITCH}}{\pi (\text{MEAN BETWEEN MEAN 'T' AND MEAN 'E'})}$
- PROPER APPLICATION AND FUNCTION OF CLOSURE REQUIRES THAT VARIATIONS IN THE 'E' DIAMETER SHOULD FOLLOW THOSE OF 'T' SUBJECT TO NORMAL MANUFACTURING CONDITIONS, INCLUDING THE THREAD PROFILE ILLUSTRATED.
- THIS FINISH IS NOT INTENDED TO BE USED FOR CONTENTS UNDER PRESSURE. FOR SUCH APPLICATIONS IT IS THE RESPONSIBILITY OF THE GLASS CONTAINER PURCHASER TO CONSULT WITH ITS CLOSURE AND CONTAINER SUPPLIERS.

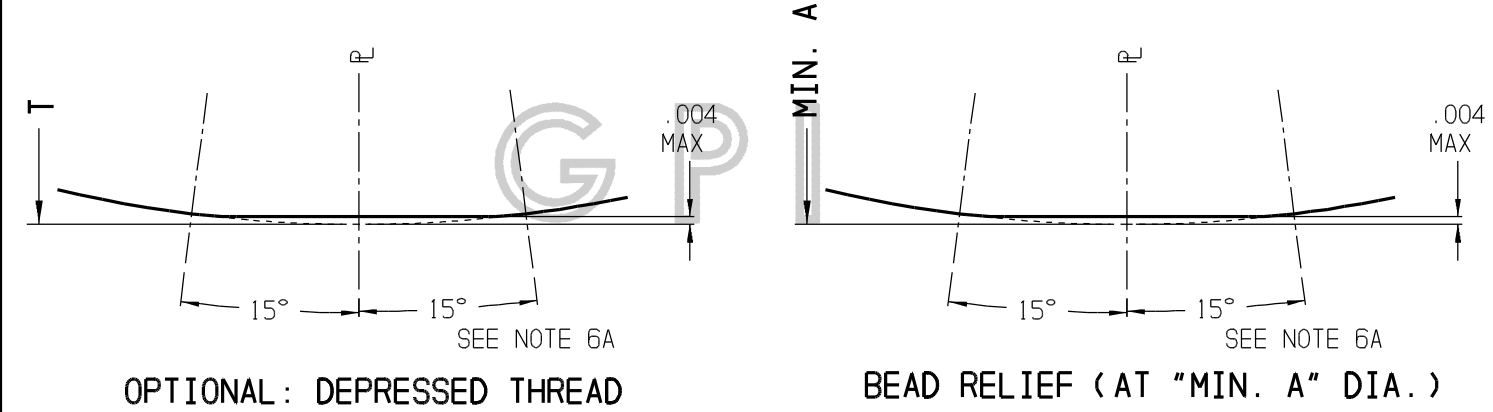

THIS OFFICIAL GLASS PACKAGING INSTITUTE PRINT CONSTITUTES ONE IN A SERIES OF VOLUNTARY STANDARDS INTENDED TO PROVIDE A BASIS FOR ACHIEVING COMPATIBILITY AND INTERCHANGEABILITY BETWEEN MANUFACTURERS AND USERS OF GLASS CONTAINERS AND CLOSURES THEREFOR. THE USER SHOULD BE AWARE THAT OTHER CONTAINER AND CLOSURE DESIGNS MAY DIFFER FROM THIS VOLUNTARY STANDARD, AND IT IS THE USER'S RESPONSIBILITY TO MAKE THE FINAL DETERMINATION AS TO DESIGN AND COMPATIBILITY. GPI ASSUMES NO RESPONSIBILITY FOR EITHER THE USE OF OR INTERPRETATION OF THE STANDARD, FOR IT BEING CURRENT, OR FOR THE DETERMINATION WHETHER ANY PARTICULAR MANUFACTURER'S PRODUCT CONFORMS TO THE STANDARD. THIS DRAWING CONTAINS INFORMATION TAKEN FROM ONE OR MORE PRINTS OF THE GLASS PACKAGING INSTITUTE (GPI). GPI OWNS ALL RIGHT, TITLE AND INTEREST IN THE COPYRIGHTS TO THIS DRAWING AND TO THESE PRINTS. GPI REQUIRES THAT YOU NOT REPRODUCE THIS DRAWING FOR OR DISTRIBUTE THIS DRAWING TO ANY THIRD PARTY WITHOUT GPI'S WRITTEN CONSENT. ANY INQUIRIES OR SUGGESTIONS CONCERNING THIS STANDARD CAN BE ADDRESSED TO THE GLASS PACKAGING INSTITUTE, WASHINGTON D.C. AT WWW.GPI.ORG.

COPYRIGHT © GPI 1993, 1996, 1999, 2001

Edward A. Grant CHAIRMAN	PRINTED AND DISTRIBUTED AS A VOLUNTARY STANDARD BY <b>GLASS PACKAGING INSTITUTE</b> SUBCOMMITTEE ON DESIGN AND SPECIFICATIONS	APPROVED FOR PUBLICATION 10-19-00	SUPERSEDES DWG. NO. 16107
GLASS FINISH NUMBER <b>1610</b>		GPI DWG. NO.	
30 mm SHORT FLANGE ROLL-ON FINISH		<b>16108</b>	